



FIGURE 1

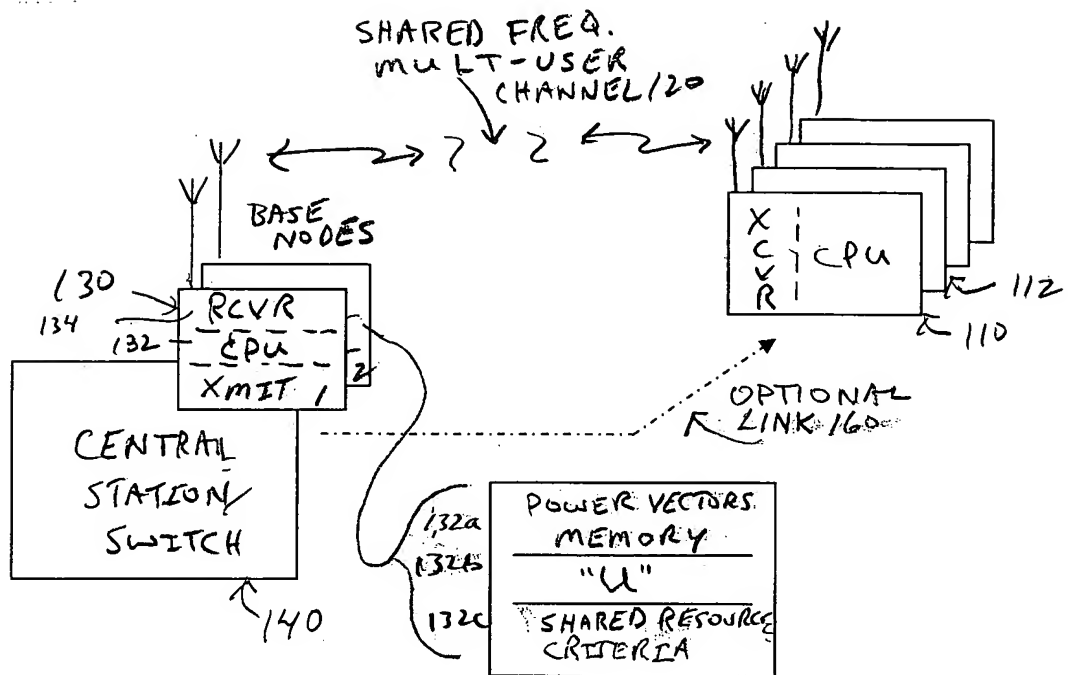

100

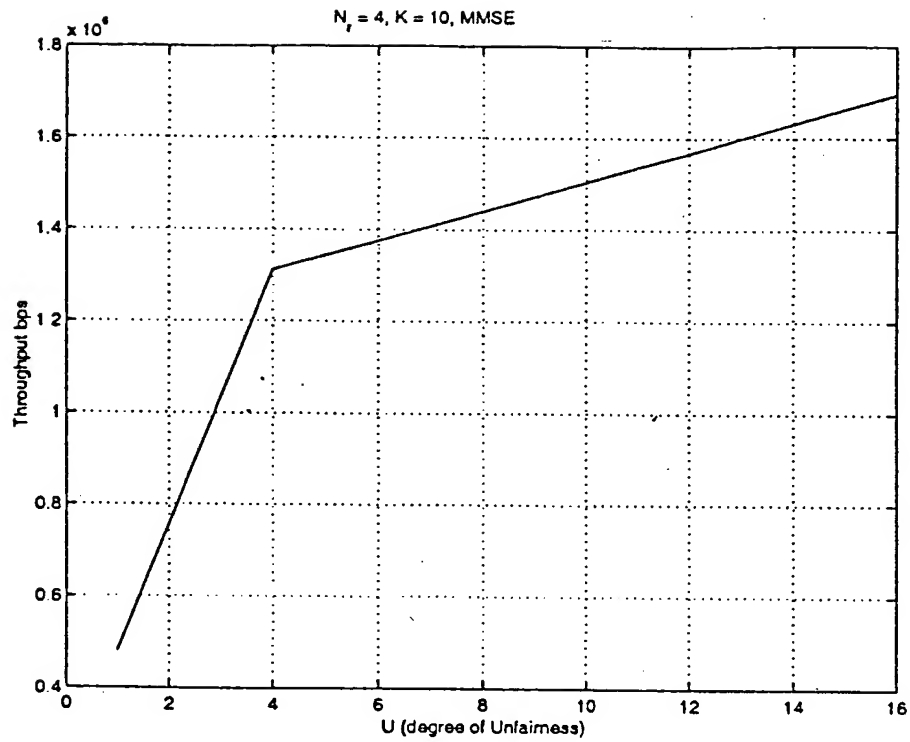

System throughput for various values of U . MMSE receiver with ideal successive interference cancellation. Selection criteria is minimization of maximum transmit power

FIG. 2